





DESCRIPTION

- Class C leakage class according to EN1751
- For maintaining constant air volume in ventilation systems, without additional power supply
- Made of galvanized steel sheet, damper blade made of anodized aluminium sheet
- Recommended airflow velocity from 3 to 8 m/s, at pressure difference $\Delta p > 50$ Pa
- Adjusting required constant amount is done by turning of working screw on the right side of the cover

RKP-C-N

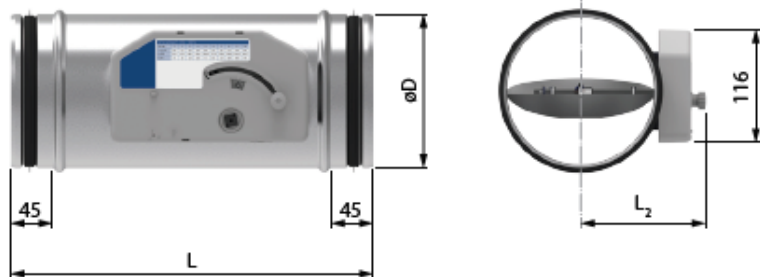

RKP-C-N-Z

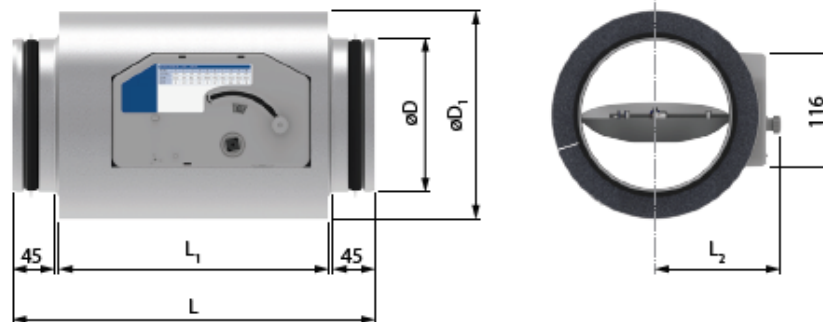

Dimensions

Dn [mm]	V _{min} [m ³ /h]	V _{max} [m ³ /h]	øD [mm]	øD ₁ [mm]	L [mm]	L ₁ [mm]	L ₂ [mm]	m [kg]	m(z) [kg]
100	100	250	98	155	350	251	93	1,2	2,0
125	125	350	123	180	360	261	106	1,4	2,4
160	300	700	158	215	380	281	123	1,8	3,2
200	350	900	198	255	400	301	143	2,3	4,2
250	550	1700	248	305	425	326	165	3,6	6,1
315	800	2400	313	370	485	386	201	5,0	8,7
400	1450	4000	398	455	530	431	243	6,9	12,2