

VENTILATION LOUVRES, VAV, CAV DAMPERS

VAV DAMPER

RVP-P




DESCRIPTION

- Volume flow control regulation by a given set-point
- Factory parametrization in accordance with clients request
- High regulation precision

- No maintenance required

OPTIONS

- Constant mode
- Master-slave mode
- Insulated casing (50mm)
- MP-Bus (Belimo), LONWORKS (Belimo), Modbus/Bacnet (Belimo), KNX (Belimo, Siemens), MF (no BUS Belimo), SGB (no BUS Siemens), BACNet (Siemens)

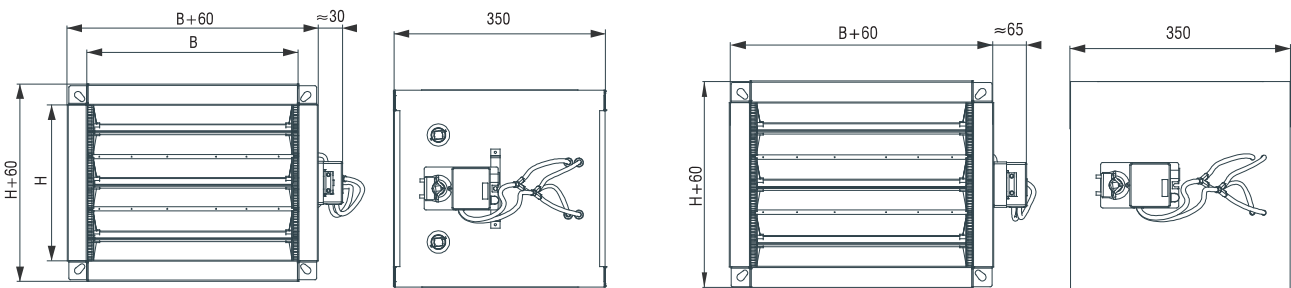

Specifications

B [mm]	H [mm]	A _{ef} [mm]	V _{min} [m³/h]	V _{max} [m³/h]	B [mm]	H [mm]	A _{ef} [mm]	V _{min} [m³/h]	V _{max} [m³/h]	
200	100	0,0170	130	720	800	400	0,2720	2005	11520	
300		0,0255	190	1080	900		0,3060	2260	12960	
400		0,0340	255	1440	1000		0,3401	2510	14400	
200	200	0,0340	255	1440	700	700	0,2975	2195	12600	
300		0,0510	380	2160	800		0,3400	2510	14400	
400		0,0680	505	2880	900		0,3825	2820	16200	
500		0,0850	630	3600	1000		0,4250	3135	18000	
600	300	0,1020	755	4320	600	600	0,3060	2260	12960	
300		0,0765	570	3240	900		0,4590	3385	19440	
400		0,1020	755	4320	1000		0,5100	3760	21600	
500		0,1275	940	5400	700	700	0,4165	3070	17640	
600		0,1530	1130	6480	800		0,4760	3510	20160	
700		0,1785	1320	7560	900		0,5355	3950	22680	
800		0,2040	1505	8640	1000		0,5950	4385	25200	
900		400	0,2295	1695	9720	800	800	0,5440	4010	23040
1000			0,2550	1880	10800	900		0,6120	4515	25920
400			900	0,1360	1005	5760	1000	0,6800	5015	28800
500	0,1700			1255	7200	900	0,6885	5075	29160	
600	0,2040			1505	8640	1000	0,7650	5640	32400	
700	0,2380			1755	10080	1000	0,8500	6265	36000	